



Presskabelschuhe PEKA/iCrimp

- Werkstoff: E-Cu Rohr
- Oberfläche: verzinkt




Cosses de câble à sertir PEKA/iCrimp

- Matière: tube en cuivre électrolytique
- Surface: étamée



Presskabelschuhe PEKA/iCrimp

	Leiter/Conducteur mm ²	d1	d3	d2	b	l	a
6-06	6	3.5	6.5	6.4	11.0	21.5	9.0
6-08				8.4	15.0	24.0	
6-10				10.5	18.0	26.0	
10-06	10	5.0	8.0	6.4	12.0	25.0	12.0
10-08				8.4	15.0	28.0	
10-10				10.5	18.0	31.0	
10-12				13.0	20.0	32.0	
16-06	16	5.5	8.5	6.4	12.0	26.5	13.0
16-08				8.4	15.0	29.0	
16-10				10.5	18.0	31.0	
16-12				13.0	19.0	32.0	
25-06	25	7.0	10.0	6.4	15.0	31.5	15.0
25-08				8.4	16.0	33.0	
25-10				10.5	18.0	34.5	
25-12				13.0	20.0	36.0	
25-14				15.0	22.0	39.0	
25-16				17.0	26.0	42.0	
35-06	35	8.5	12.0	6.4	17.0	33.0	17.0
35-08				8.4	17.0	34.0	
35-10				10.5	20.0	36.5	
35-12				13.0	22.0	37.5	
35-14				15.0	23.0	40.0	
35-16				17.0	28.0	44.0	
50-06	50	10.0	14.0	6.4	20.0	37.0	19.0
50-08				8.4	20.0	39.0	
50-10				10.5	20.0	40.5	
50-12				13.0	23.0	42.0	
50-14				15.0	23.0	44.0	
50-16				17.0	27.0	46.0	
70-08	70	12.0	16.5	8.4	24.0	42.5	21.0
70-10				10.5	24.0	43.5	
70-12				13.0	24.0	45.0	
70-14				15.0	25.0	46.0	
70-16				17.0	28.0	48.5	
95-08	95	13.5	18.0	8.4	26.0	46.0	23.0
95-10				10.5	26.0	47.0	
95-12				13.0	26.0	48.0	
95-14				15.0	26.0	51.5	
95-16				17.0	28.0	51.0	
120-10	120	15.0	20.0	10.5	29.0	53.5	26.0
120-12				13.0	29.0	53.5	
120-14				15.0	30.0	53.0	
120-16				17.0	30.0	55.0	

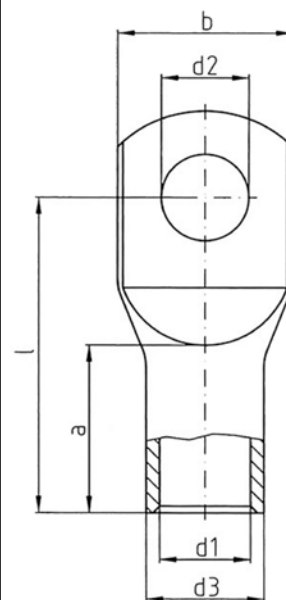



Presskabelschuhe PEKA/iCrimp

- Werkstoff: E-Cu Rohr
- Oberfläche: verzinkt




Cosses de câble à sertir PEKA/iCrimp

- Matière: tube en cuivre électrolytique
- Surface: étamée




Presskabelschuhe PEKA/iCrimp

	Leiter/Conducteur mm ²	d1	d3	d2	b	l	a
150-10	150	16.8	21.3	10.5	31.0	56.5	29.0
150-12				13.0	31.0	56.0	
150-14				15.0	31.0	57.0	
150-16				17.0	31.0	58.0	
150-20				21.0	35.0	63.0	
185-08	185	19.0	24.0	8.4	35.0	63.0	30.0
185-10				10.5	35.0	63.0	
185-12				13.0	35.0	63.0	
185-14				15.0	35.0	61.0	
185-16				17.0	35.0	63.0	
185-20				21.0	35.0	66.0	
240-12	240	21.0	26.0	13.0	38.0	71.5	35.0
240-14				15.0	38.0	69.0	
240-16				17.0	38.0	69.5	
240-20				21.0	38.0	71.0	
300-12	300	24.0	30.0	13.0	44.0	82.0	42.0
300-14				15.0	44.0	84.0	
300-16				17.0	44.0	85.0	
300-20				21.0	44.0	85.0	
400-16	400	27.5	33.5	17.0	49.0	92.0	47.0
400-20				21.0	49.0	92.0	

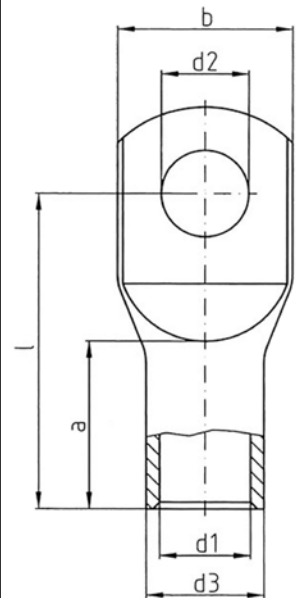

Winkel-Presskabelschuh PEKA/iCrimp

	Leiter/Conducteur mm ²	d1	d3	d2	b	l	a
6-06-W	6	3.5	6.5	6.4	11.0	13.3	8.0
6-08-W				8.4	15.0	15.3	
10-06-W	10	4.5	7.0	6.4	12.0	12.5	9.0
10-08-W				8.4	15.0	15.5	
10-10-W				10.5	18.0	17.5	
10-12-W				13.0	20.0	18.5	
16-06-W	16	5.5	8.5	6.4	12.0	14.3	12.0
16-08-W				8.4	15.0	16.3	
16-10-W				10.5	18.0	18.3	
16-12-W				13.0	20.0	19.3	
25-06-W	25	7.0	10.0	6.4	15.0	15.5	14.0
25-08-W				8.4	16.0	17.5	
25-10-W				10.5	18.0	19.5	
25-12-W				13.0	20.0	20.5	
25-14-W				15.0	22.0	22.5	

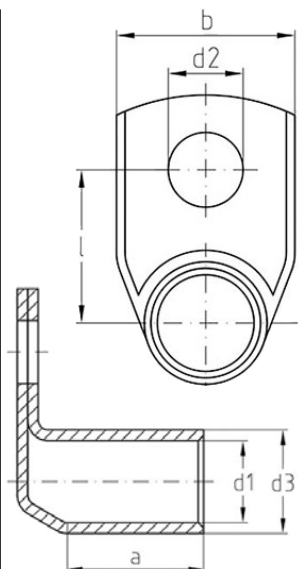

CHF (exkl. MWST / excl. TVA)
freibleibend / sans engagement