



DIN-Presskabelschuhe (DIN 46235)

- Werkstoff: E-Cu Rohr
- Oberfläche: verzinkt




Cosses de câble à sertir DIN (DIN 46235)

- Matière: tube en cuivre électrolytique
- Surface: étamée



DIN-Presskabelschuhe

	KZ No		Leiter/Conducteur mm²	d1	d3	d2	b	l	a
DIN-6-06	5		6	3.7	5.5	6.4	9.0	24.0	10.0
DIN-6-08						8.4	13.0	26.0	
DIN-10-06	6		10	4.4	6.0	6.4	10.0	27.0	10.0
DIN-10-08						8.4	13.0	28.0	
DIN-16-06	8		16	5.5	8.5	6.4	13.0	36.0	20.0
DIN-16-08						8.4	13.0	37.0	
DIN-16-10						10.5	16.5	38.0	
DIN-16-12						13.0	19.0	40.0	
DIN-25-06	10		25	7.0	10.0	6.4	14.0	39.0	20.0
DIN-25-08						8.4	17.0	39.0	
DIN-25-10						10.5	17.0	40.5	
DIN-25-12						13.0	18.0	40.5	
DIN-35-08	12		35	8.2	12.5	8.4	18.0	42.0	20.0
DIN-35-10						10.5	20.0	42.5	
DIN-35-12						13.0	21.0	44.0	
DIN-50-06	14		50	9.8	14.5	6.4	20.0	52.0	28.0
DIN-50-08						8.4	20.0	52.0	
DIN-50-10						10.5	22.0	52.0	
DIN-50-12						13.0	24.0	52.0	
DIN-50-16						17.0	28.0	55.5	
DIN-70-08	16		70	11.3	16.5	8.4	24.0	56.0	28.0
DIN-70-10						10.5	24.0	56.0	
DIN-70-12						13.0	24.0	56.5	
DIN-70-16						17.0	29.0	57.0	
DIN-95-08	18		95	13.5	19.0	8.4	28.0	65.0	35.0
DIN-95-10						10.5	28.0	65.5	
DIN-95-12						13.0	28.0	65.5	
DIN-95-16						17.0	30.0	65.5	
DIN-120-10	20		120	15.5	21.0	10.5	31.0	70.0	35.0
DIN-120-12						13.0	31.0	70.5	
DIN-120-16						17.0	31.5	70.0	
DIN-150-10	22		150	17.0	23.5	10.5	34.0	79.0	35.0
DIN-150-12						13.0	34.0	78.5	
DIN-150-14						15.0	34.0	78.0	
DIN-150-16						17.0	34.0	78.0	
DIN-150-20						21.0	38.0	78.0	
DIN-185-12	25		185	19.0	25.5	13.0	37.0	82.5	40.0
DIN-185-16						17.0	37.0	82.0	
DIN-240-12	28		240	21.5	29.0	13.0	42.5	92.0	40.0
DIN-240-16						17.0	42.5	92.0	
DIN-300-12	32		300	24.5	32.0	13.0	48.5	104.0	42.0
DIN-300-16						17.0	48.5	100.0	
DIN-400-12	38		400	27.5	38.5	13.0	55.0	117.0	70.0
DIN-400-16						17.0	55.0	117.0	
DIN-500-20	42		500	31.0	42.0	21.0	60.0	130.0	70.0
DIN-625-20	44		625	34.5	44.0	21.0	63.0	135.0	80.0

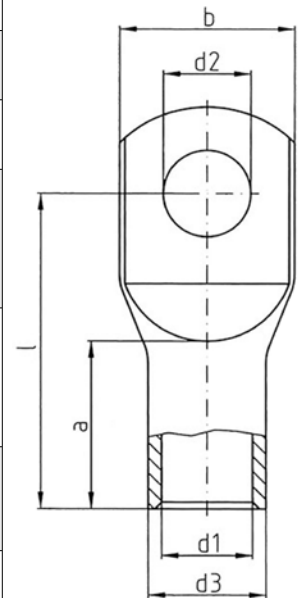

3

CHF (exkl. MWST / excl. TVA)
freibleibend / sans engagement